


Configuration:	
Lite	
Visible Light	
Transmittance (LT)	88%
Reflectance - Outdoors (LR)	7%
Reflectance - Indoors	7%
Solar Energy	
Transmittance	76%
Reflectance - Outdoors (ER)	7%
U.V. Light	
Transmittance	0%
Damage Weighted Index -ISO	57%
U-Values	
Winter - Air	1.00
Summer - Air	0.91
Other Values	
Solar Heat Gain Coefficient (SHGC)	0.81
Shading Coefficient	0.93
Relative Heat Gain - BTU/Hr/Sq. Ft.	199
Light to Solar Heat Gain Ratio	1.09

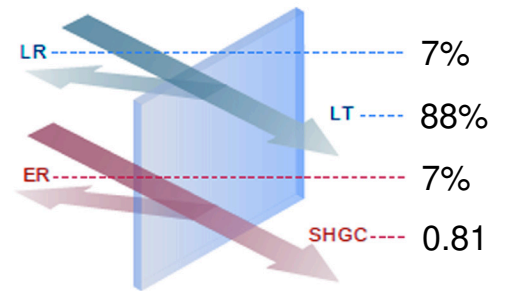

*Performance values are based on representative production samples and product modeling data using LBNL Window Software. Actual values may differ due to variations in the manufacturing process.

*Thermal stresses or building codes may require the use of heat-treated glass. This document is not an evaluation of the risk of glass breakage from thermal stresses. Contact AGC's Technical Services department to ensure the correct form of glass to be supplied for the structure. 1-888-234-8380

AGC offers the Broadest Product Range in the Industry

ARCHITECTURAL

ENERGY SELECT
SOLAR CONTROL LOW-E

ENERGY SELECT 25
HI PERFORMANCE LOW-E

U4 4TH SURFACE TECHNOLOGY

STOPSOL
REFLECTIVE COATED GLASS

SOLARSHIELD
TINTED FLOAT GLASS

INTERIOR

KRYSTAL KOLOURS
BACK-PAINTED GLASS

KRYSTAL PATTERNS
TEXTURED GLASS

KRYSTAL IMAGES
DIGITAL IMAGING

KRYSTAL KLEAR
PREMIUM LOW-IRON GLASS

MATELUX
ACID-ETCHED GLASS

RESIDENTIAL

COMFORT SELECT
SOLAR CONTROL LOW-E

COMFORT SELECT
SOLAR GAIN LOW-E

U4 4TH SURFACE TECHNOLOGY

SOLARSHIELD
TINTED FLOAT GLASS

FIRE-RATED

PYROBEL™
FIRE-RESISTANT GLASS

PYROEDGE™ 20

VISION 120

STILELITE
FRAMING SYSTEMS

PYRAN® PLATINUM
FIRE-PROTECTIVE GLASS